

EBECRYL® 8501

Low Energy Cure Resin for Automotive Refinish and Metal

March 2017



INTRODUCTION

EBECRYL 8501 is an aliphatic urethane acrylate designed for use in automotive refinish and general metal applications. Films of EBECRYL 8501 exhibit a unique blend of flexibility and toughness coupled with good corrosion resistance. EBECRYL 8501 contains isobornyl acrylate (IBOA)⁽¹⁾ as a reactive diluent.

PERFORMANCE HIGHLIGHTS

EBECRYL 8501 is characterized by:

- Excellent cure response under low light intensity conditions
- Good wetting of inert and reactive fillers
- 1K package configuration with 2K performance properties for automotive refinish putties
- Reduce sanding time compared to 2K automotive refinish putties
- Deep dent repair
- Easily sculptured to car body shape

Cured products containing EBECRYL 8501 are characterized by the following performance properties:

- Excellent adhesion to metal, metallic, and various automotive substrates
- Good flexibility and toughness
- Low shrinkage upon cure

The actual properties of UV/EB cured products also depend on the selection of other formulation components such as reactive diluents, additives, and photoinitiators.

SUGGESTED APPLICATIONS

EBECRYL 8501 is recommended for use in:

- Low energy cure
- Automotive end of line spot repair
- Automotive refinish
- General metal
- Metallized plastics
- Flexible filled coatings
- Thin film solar cell

USAGE

EBECRYL 8501 will typically constitute between 40 and 60% of the final UVA curable body putty.

SPECIFICATIONS

	VALUE
Appearance	Clear to clouded liquid
Color, Gardner scale, max.	2
Viscosity, 25°C, cP/mPa·s	30000-43000

TYPICAL PHYSICAL PROPERTIES


Density, g/ml at 25°C	1.10
Functionality, theoretical ⁽²⁾	3.0
Oligomer, % by weight	85

TYPICAL CURED PROPERTIES⁽³⁾

Tensile, psi (MPa)	4200 (29)
Elongation at break, %	28
Toughness, psi (MPa)	1000 (6.9)
Young's modulus, psi (MPa)	120000 (828)

GRAPH I

EBECRYL 8501 - VISCOSITY REDUCTION WITH REACTIVE DILUENTS

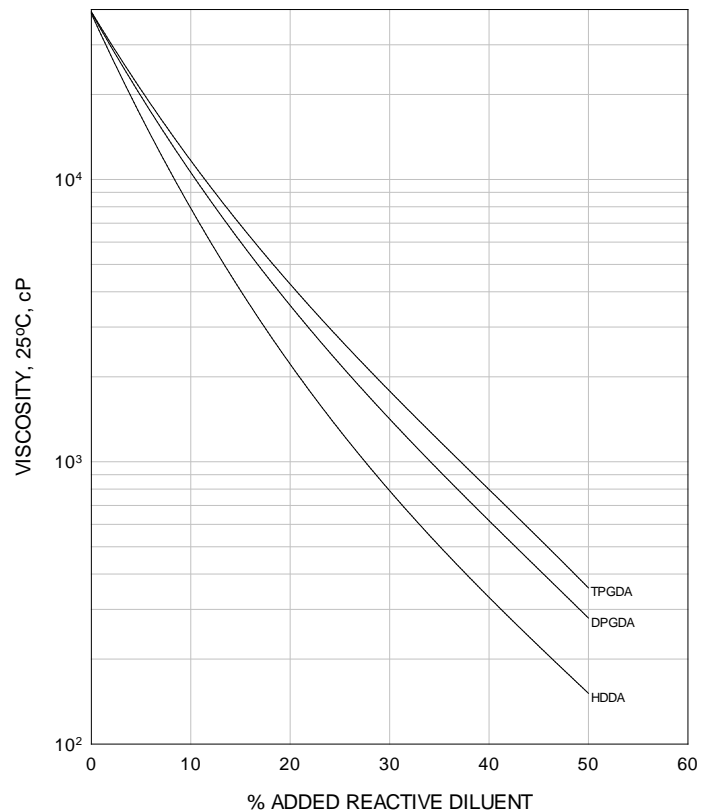

(1) Product of allnex

(2) Theoretical determination based on the undiluted oligomer.

(3) UV cured 125 μ thick films.


VISCOSITY REDUCTION

Graph I shows the viscosity reduction of EBECRYL 8501 with dipropylene glycol diacrylate (DPGDA)⁽¹⁾, 1,6-hexanediol diacrylate (HDDA)⁽¹⁾, and tripropylene glycol diacrylate (TPGDA)⁽¹⁾. Although viscosity reductions can be achieved with non-reactive solvents, reactive diluents are preferred because they are essentially 100% converted during UV exposure to form an integral part of the coating, thus avoiding solvent emissions. The specific reactive diluent used will influence performance properties such as flexibility and adhesion.

Graph II illustrates the change in viscosity of EBECRYL 8501 with increasing temperature.

GRAPH II

EBECRYL 8501 - VISCOSITY VS. TEMPERATURE

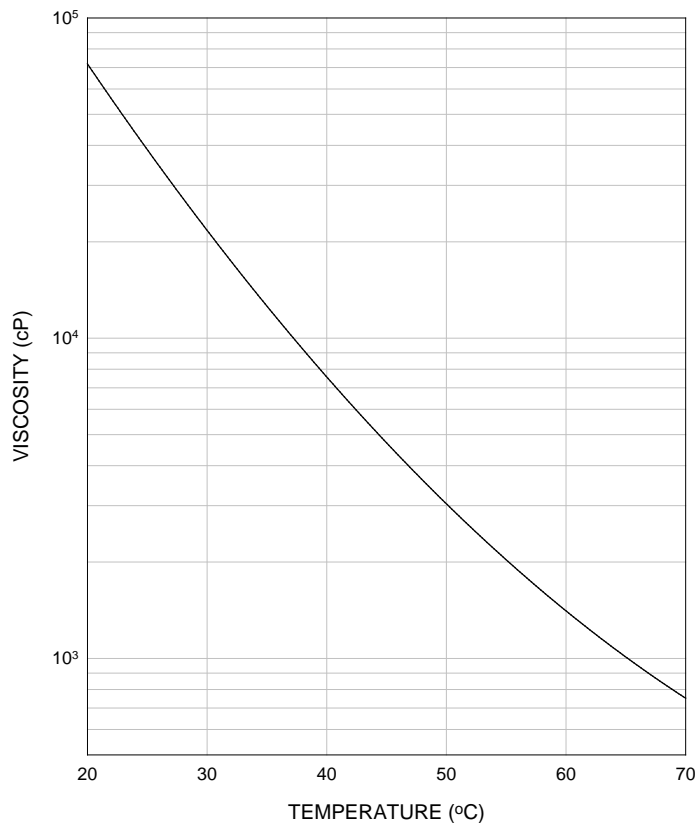

PRECAUTIONS

Before using EBECRYL 8501, see the Safety Data Sheet (SDS) for information on the identified hazards of the material and the recommended personal protective equipment and procedures.

STORAGE AND HANDLING

Care should be taken not to expose the product to high temperature conditions, direct sunlight, ignition sources, oxidizing agents, alkalis or acids. This might cause uncontrollable polymerization of the product with the generation of heat. Storage and handling should be in stainless steel, amber glass, amber polyethylene or baked phenolic lined containers. Procedures that remove or displace oxygen from the material should be avoided. Do not store this material under an oxygen free atmosphere. Dry air is recommended to displace material removed from the container. Wash thoroughly after handling. Keep container tightly closed. Use with adequate ventilation.

See the SDS for the recommended storage temperature range for EBECRYL 8501.

Please refer to the allnex Guide to Safety and Handling of Acrylate Oligomers and Monomers for additional information on the safe handling of acrylates.

(1) Product of allnex

www.allnex.com

Disclaimer: allnex Group companies ("allnex") decline any liability with respect to the use made by anyone of the information contained herein. The information contained herein represents allnex's best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, regarding the accuracy, the completeness or relevance of the data set out herein). Nothing contained herein shall be construed as conferring any license or right under any patent or other intellectual property rights of allnex or of any third party. The information relating to the products is given for information purposes only. No guarantee or warranty is provided that the product and/or information is adapted for any specific use, performance or result and that product and/or information do not infringe any allnex and/or third party intellectual property rights. The user should perform his/her own tests to determine the suitability for a particular purpose. The final choice of use of a product and/or information as well as the investigation of any possible violation of intellectual property rights of allnex and/or third parties remains the sole responsibility of the user.

Notice: Trademarks indicated with ®, ™ or * as well as the allnex name and logo are registered, unregistered or pending trademarks of Allnex IP s.à.r.l. or its directly or indirectly affiliated allnex Group companies.