


Hostavin®* 3212 liq.

Light stabilizers mixture for coatings

General Hostavin 3212 liq. is a 100% liquid blend of an oxalanilide based UV absorber with a low molecular weight HALS.

Chemical Composition

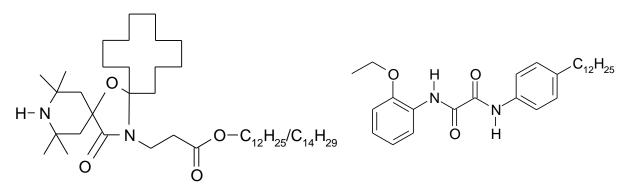

Chemical Name:	2-Ethyl, 2´-ethoxy-oxalanilide + Mixture of 2,2,4,4- tetramethyl-20-(ß-myristyl-oxycarbonyl)-ethyl-7- oxa-3,20-diaza-dispiro-[5.1.11.2]-heneicosanon-21 and 2,2,4,4-tetramethyl-20-(ß-lauryl-oxycarbonyl)- ethyl-7-oxa-3,20-diaza-dispiro-(5,1,11,2)- heneicosanon-21
CAS-No.:	82493-14-9 / 119345-01-6
Classification:	2:1 mixture of oxalanilide UV absorber + low molecular weight HALS

Physical PropertiesAppearance: yellowish liquid
Active content: approx. 86%
Density: 1.00 g/cm³
Miscibility: Hostavin 3212 liq. is miscible with most of the
commonly used organic solvents, e.g. n-Butanol, Ethyl Acetate,
Xylene or White Spirit.
Water solubility is less than 0,01%.

 Clariant International Ltd.
 Phone: +800 669 966 99

 A132 Muttenz
 Fax: +41 61 469 7550

 Switzerland
 Fax: +41 61 469 7550

 \mathbb{R}^* = Product and service marks licensed to Clariant in many countries



ApplicationsHostavin 3212 liq. is recommended for the UV stabilization of
solventborne general industrial coatings, in particular for UV curing
systems and car refinish.Storage stabilityThe maximum shelf life of Hostavin 3212 liq. is 3 years when kept
cool and dry in the original sealed containers.
Storage temperatures above +40°C and below + 4°C should be
avoided.

This information corresponds to the present state of our knowledge and is intended as a general description of our products and their possible applications. Clariant makes no warranties, express or implied, as to the information's accuracy, adequacy, sufficiency or freedom from defect and assumes no liability in connection with any use of this information. Any user of this product is responsible for determining the suitability of Clariant's products for its particular application. * Nothing included in this information waives any of Clariant's General Terms and Conditions of Sale, which control unless it agrees otherwise in writing. Any existing intellectual/industrial property rights must be observed. Due to possible changes in our products and applicable national and international regulations and laws, the status of our products could change. Material Safety Data Sheets providing safety precautions, that should be observed when handling or storing Clariant products, are available upon request and are provided in compliance with applicable law. You should obtain and review the applicable Material Safety Data Sheet information before handling any of these products. For additional information, please contact Clariant.

* For sales to customers located within the United States and Canada the following applies in addition NO EXPRESS OR IMPLIED WARRANTY IS MADE OF THE MERCHANTABILITY, SUITABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE OF ANY PRODUCT OR SERVICE.

Clariant International Ltd. Rothausstrasse 61 4132 Muttenz Switzerland

Phone: +800 669 966 99 Fax: +41 61 469 7550

®* = Product and service marks licensed to Clariant in many countries