

EBECRYL® 40

Polyether Tetraacrylate

February 2017



INTRODUCTION

EBECRYL 40 is a tetrafunctional polyether acrylate characterized by low viscosity, mild odor and light color. When formulated with acrylate oligomers, EBECRYL 40 provides fast cure response in ultraviolet light (UV) and electron beam (EB) curable coatings and inks. Besides its high reactivity, EBECRYL 40 improves the hardness and solvent resistance of cured inks and coatings. EBECRYL 40 is particularly recommended for lithographic offset inks, overprint varnishes and paper upgrading.

PERFORMANCE HIGHLIGHTS

EBECRYL 40 is characterized by:

- Light color
- Low viscosity
- Low odor
- Good cure response

UV/EB cured products based on EBECRYL 40 are characterized by the following performance properties:

- High surface hardness
- Good solvent resistance
- Low residual odor
- Reduced shrinkage

The actual properties of UV/EB cured products also depend on the selection of the other formulation components, such as reactive diluents, additives, and photoinitiators.

SUGGESTED APPLICATIONS

EBECRYL 40 is commonly used as a diluting reactive oligomer in UV/EB cured coatings and inks. Effective levels of EBECRYL 40 typically range from 10% to 50% depending on the application. In lithographic inks and varnishes it is quite effective in adjusting viscosity while maintaining or improving cure response and physical properties. EBECRYL 40 is recommended for:

- Offset inks
- Overprint varnishes
- Coatings on paper, plastics
- Paper upgrading
- Reducing curl on flexible substrates

VISCOSITY REDUCTION

Graph I illustrates the viscosity reduction of several EBECRYL oligomers⁽¹⁾ used as lithographic ink vehicles when blended with an increasing weight percent of EBECRYL 40.

SPECIFICATIONS

	VALUE
Appearance	Clear liquid
Color, Gardner scale, max.	2
Viscosity, 25°C, cP/mPa·s	110-210

TYPICAL PHYSICAL PROPERTIES


Density, g/ml at 25°C	1.15
Flash point, Cleveland open cup, °C	>100
Functionality, theoretical	4

TYPICAL CURED PROPERTIES⁽²⁾

Tensile strength, psi (MPa)	5200 (36)
Elongation at break, %	4
Young's modulus, psi (MPa)	185000 (1276)
Glass transition temperature, °C ⁽³⁾	48

GRAPH I

EBECRYL 40 - DILUENCY EFFECT ON VISCOUS OLIGOMERS

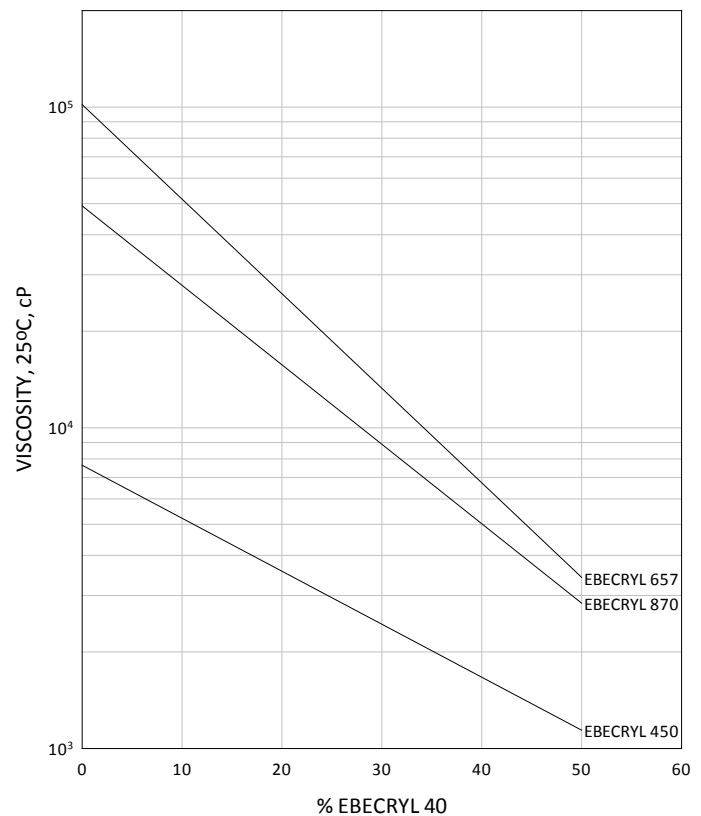

(1) Products of allnex

(2) UV cured 125 μ thick films.

(3) Determined by Dynamic Mechanical Analysis.

PRECAUTIONS

Before using EBECRYL 40, see the Safety Data Sheet (SDS) for information on the identified hazards of the material and the recommended personal protective equipment and procedures.

STORAGE AND HANDLING

Care should be taken not to expose the product to high temperature conditions, direct sunlight, ignition sources, oxidizing agents, alkalis or acids. This might cause uncontrollable polymerization of the product with the generation of heat. Storage and handling should be in stainless steel, amber glass, amber polyethylene or baked phenolic lined containers. Procedures that remove or displace oxygen from the material should be avoided. Do not store this material under an oxygen free atmosphere. Dry air is recommended to displace material removed from the container. Wash thoroughly after handling. Keep container tightly closed. Use with adequate ventilation.

See the SDS for the recommended storage temperature range for EBECRYL 40.

Please refer to the allnex Guide to Safety and Handling of Acrylate Oligomers and Monomers for additional information on the safe handling of acrylates.

www.allnex.com

Disclaimer: allnex Group companies ('allnex') decline any liability with respect to the use made by anyone of the information contained herein. The information contained herein represents allnex's best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, regarding the accuracy, the completeness or relevance of the data set out herein). Nothing contained herein shall be construed as conferring any license or right under any patent or other intellectual property rights of allnex or of any third party. The information relating to the products is given for information purposes only. No guarantee or warranty is provided that the product and/or information is adapted for any specific use, performance or result and that product and/or information do not infringe any allnex and/or third party intellectual property rights. The user should perform his/her own tests to determine the suitability for a particular purpose. The final choice of use of a product and/or information as well as the investigation of any possible violation of intellectual property rights of allnex and/or third parties remains the sole responsibility of the user.

Notice: Trademarks indicated with ®, ™ or * as well as the allnex name and logo are registered, unregistered or pending trademarks of Allnex IP s.à.r.l. or its directly or indirectly affiliated allnex Group companies.