

# CARPOL<sup>®</sup> GP-6305

**REACTIVE TRIOL**

## *Polyether Polyol*

**CARPOL<sup>®</sup> GP-6305** is a glycerin-initiated polyether polyol. The resulting material has a functionality of three and an average molecular weight of 6300 Da. This triol is polymerized with propylene oxide and then capped with 5% ethylene oxide. The outcome is a polyol with enhanced reactivity. Main applications include C.A.S.E., however, CARPOL<sup>®</sup> GP-6305 may also be included as a component in other urethane products and formulations.


### Typical End Use Applications

- Coatings
- Sealants
- Binders
- Caulks
- Adhesives
- Elastomers
- Spray Coatings
- Sport Surfaces

### Typical Analytical Properties\*

Hydroxyl Number (mg KOH / g)	27
pH (10 parts of IPA: 6 parts of H <sub>2</sub> O)	7.0
Moisture (%)	[maximum] 0.04
Color (APHA)	[maximum] 35
Appearance	Free & Clear
Viscosity @ 25 °C (cP)	1180
Density @ 25 °C (lb / gal)	8.49
Potassium (ppm)	[maximum] 1.0

### Viscosity Profile

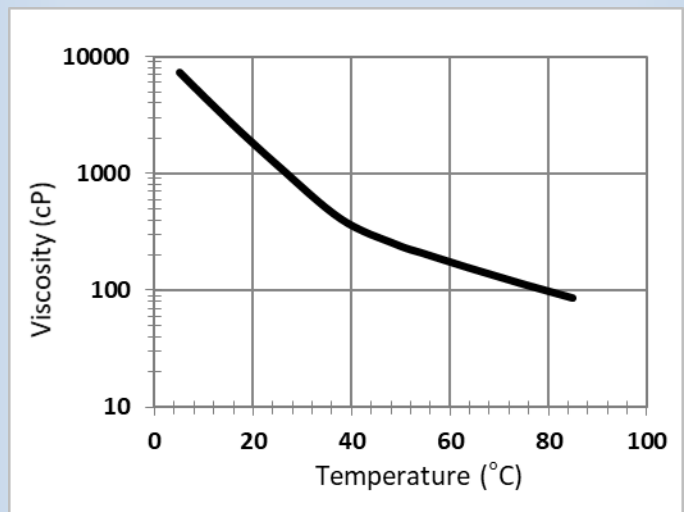

### Viscosity Information

77 °F	100 °F	120 °F
1180 cP	413 cP	251 cP

\*Please note that these values are not specifications

## Storage Information

CARPOL<sup>®</sup> GP-6305 will absorb water if the product container is not secured properly. This may affect reactivity, appearance, and performance. Therefore, it is advised that all receptacles containing this material be tightly fastened and stored in a dry place.

Consult the Safety Data Sheet for additional information.

## Health and Safety Information

Health and safety information is available in the form of a Safety Data Sheet. This literature, describing proper precautions and personal protective gear, is available for review. To receive this information please contact a Carpenter Co. representative.

## Ordering and Shipping Options

CARPOL<sup>®</sup> GP-6305 can be acidified to a nominal pH of 5, 5.5, or 6 upon request. These materials are denoted as CARPOL<sup>®</sup> GP-6305-50 polyether polyol, CARPOL<sup>®</sup> GP-6305-55 polyether polyol, and CARPOL<sup>®</sup> GP-6305-60 polyether polyol, respectively.

<u>Sample Sizes</u>	<u>Products Packaged/Shipped</u>
1 quart	Drum 460 lb net wt.
1 gallon	Tote bin 2,300 lb net wt.
5 gallon	Tank wagon 40,000-45,000 lb net wt. Railcar 185,000-189,000 lb net wt.

For additional information please contact:

Carpenter Co.  
Chemicals Division  
**Customer Service 800-260-5373**  
5016 Monument Avenue  
Richmond VA 23230

Updated 21 Jan 2022

**Important:** The information contained in this product data sheet is offered for your consideration, investigation, and verification. The data is presented in good faith and is believed to be reliable. Carpenter, however, makes no representation as to the completeness or accuracy. Carpenter makes no warranty, express or implied, with respect to the data contained herein. Carpenter cannot anticipate all conditions under which this data and the product may be used. The conditions of handling, storage, use, and disposal of the product are beyond Carpenter's control. Thus we expressly disclaim responsibility or liability for any loss, damage, or expense arising out of reliance on the information contained herein. You are advised to make your own determination as to safety, suitability, and appropriate manner of handling, storage, use, and disposal. For further information please consult the appropriate Carpenter Safety Data Sheet. **Warning:** These products can be used to prepare a variety of polyurethane products. Polyurethanes are organic materials and must be considered combustible.