

# EBECRYL® 811

Lithographic Ink Varnish

March 2017



## INTRODUCTION

EBECRYL 811 is an ultraviolet light (UV) or electron beam (EB) curable polyester acrylate for either wet or dry offset printing on plastic substrates. Inks made using EBECRYL 811 obtain excellent adhesion to calendered vinyl, polystyrene, polyolefins, polycarbonate and PVC. The water balance of this product allows inks based upon it to be run on press with low amounts of fountain solution: a key parameter for printing on non-absorbent substrates.

## PERFORMANCE HIGHLIGHTS

- Primary component for wet or dry offset inks to be printed on plastics
- Excellent water balance for printing on non- absorbent substrates
- Excellent adhesion to a variety of plastic substrates including calendered vinyl, polystyrene, polyolefins, polycarbonate and PVC
- Neither chlorinated nor acidic in nature
- Very low misting

The actual properties of UV/EB cured products also depend on the selection of other formulation components such as reactive diluents, additives and photoinitiators.

## SUGGESTED APPLICATIONS

EBECRYL 811 is recommended for wet or dry offset inks, specifically for printing credit cards and smart cards. It may also be used for printing on plastic signage and banners as well as containers.

## TYPICAL TACK RANGES<sup>(1)</sup>

Oligomer / Reactive diluent	Tack, g-m
EBECRYL 811	17-19
EBECRYL 811/5% OTA-480	11-13
EBECRYL 811/10% OTA-480	7-9
EBECRYL 811/5% TPGDA	10-12
EBECRYL 811/10% TPGDA	5-7

## SPECIFICATIONS


	VALUE
Acid value, mg KOH/g, max.	9
Appearance	Clear liquid
Viscosity, 60°C, cP/mPa-s	1600-2450

## TYPICAL PROPERTIES

Density, g/ml at 25°C	1.14
Functionality, theoretical	4

## GRAPH I

EBECRYL 811 - VISCOSITY REDUCTION WITH REACTIVE DILUENTS

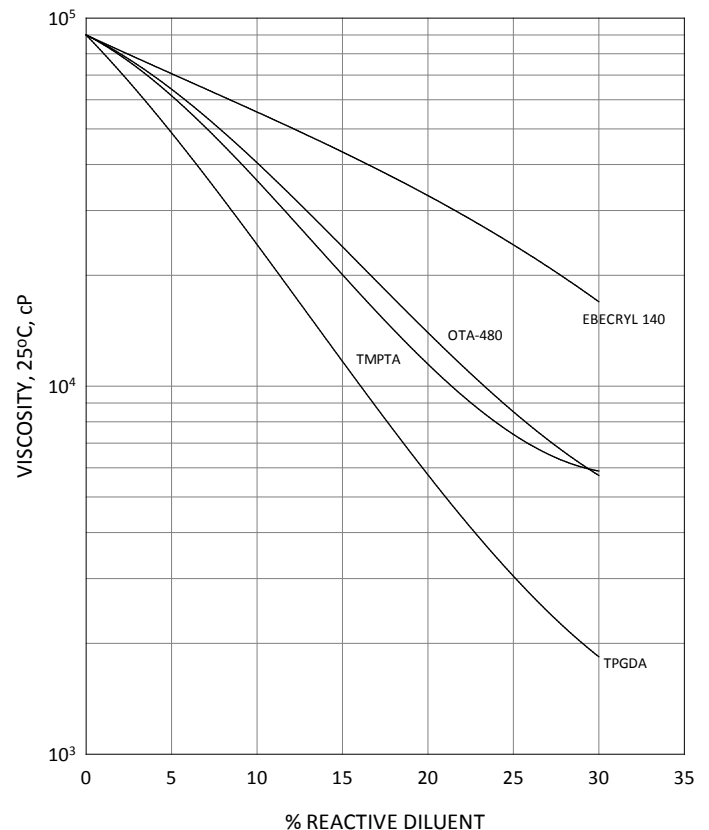

(1) 400 RPM, 90°F, 3 minutes; Thwing-Albert Electronic Inkometer

## VISCOSITY REDUCTION

Graph I show the viscosity reduction of EBECRYL 811 with the reactive diluents EBECRYL 140<sup>(1)</sup> (ditrimethylolpropane tetraacrylate), OTA-480<sup>(1)</sup> (propoxylated glycerol triacrylate), TMPTA<sup>(1)</sup> (trimethylolpropane triacrylate) and TPGDA<sup>(1)</sup> (tripropylene glycol diacrylate). Although viscosity reduction can be achieved with non-reactive solvents, reactive diluents are preferred because they are essentially 100 percent converted during UV/EB exposure to form a part of the coating or ink, thus avoiding solvent emissions. The specific reactive diluents used will influence performance properties such as hardness and flexibility.

## PRECAUTIONS

Before using EBECRYL 811, see the Safety Data Sheet (SDS) for information on the identified hazards of the material and the recommended personal protective equipment and procedures.

## STORAGE AND HANDLING

Care should be taken not to expose the product to high temperature conditions, direct sunlight, ignition sources, oxidizing agents, alkalis or acids. This might cause uncontrollable polymerization of the product with the generation of heat. Storage and handling should be in stainless steel, amber glass, amber polyethylene or baked phenolic lined containers. Procedures that remove or displace oxygen from the material should be avoided. Do not store this material under an oxygen free atmosphere. Dry air is recommended to displace material removed from the container. Wash thoroughly after handling. Keep container tightly closed. Use with adequate ventilation.

See the SDS for the recommended storage temperature range for EBECRYL 811.

EBECRYL 811 has an inherent penetrating odor and should be used only in well ventilated areas or under adequate exhaust.

Please refer to the allnex Guide to Safety and Handling of Acrylate Oligomers and Monomers for additional information on the safe handling of acrylates.

(1) Product of allnex

[www.allnex.com](http://www.allnex.com)

Disclaimer: allnex Group companies ("allnex") decline any liability with respect to the use made by anyone of the information contained herein. The information contained herein represents allnex's best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, regarding the accuracy, the completeness or relevance of the data set out herein). Nothing contained herein shall be construed as conferring any license or right under any patent or other intellectual property rights of allnex or of any third party. The information relating to the products is given for information purposes only. No guarantee or warranty is provided that the product and/or information is adapted for any specific use, performance or result and that product and/or information do not infringe any allnex and/or third party intellectual property rights. The user should perform his/her own tests to determine the suitability for a particular purpose. The final choice of use of a product and/or information as well as the investigation of any possible violation of intellectual property rights of allnex and/or third parties remains the sole responsibility of the user.

Notice: Trademarks indicated with ®, ™ or \* as well as the allnex name and logo are registered, unregistered or pending trademarks of Allnex IP s.à.r.l. or its directly or indirectly affiliated allnex Group companies.