


# InCal<sup>®</sup> 3T

InCal<sup>®</sup> 3T is a remarkably pure and highly engineered treated ground calcium carbonate product with specifications designed to ensure performance in stringent, technical applications such as those found in the manufacture of blow molded bottles, injection molded parts, rubber compounds, adhesives, sealants and extruded profiles.

Typical Chemical Composition		
Attribute	Value	Method
% <i>CaCO<sub>3</sub></i>	99.3 %	XRF
% <i>Acid Insoluble Fraction</i>	0.3 %	XRF
% <i>Coating</i>	1 %	Burn Off
Typical Particle Size Distribution		
<i>Median</i>	3.5 $\mu\text{m}$	Malvern – Alcohol
<i>Topcut</i>	20 $\mu\text{m}$	
Typical Color		
<i>Brightness</i>	94	Hunter L*

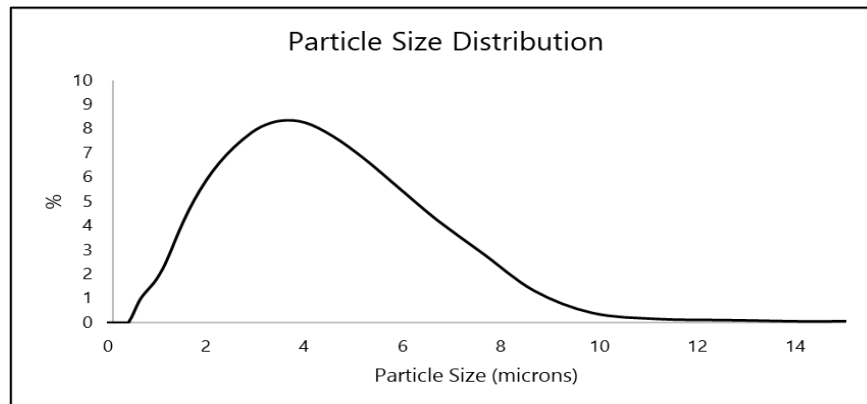

**INCOA**  
PERFORMANCE MINERALS

**2180 South 1300 East Suite 600 Salt Lake City, UT 84106**  
**[www.incoa.com](http://www.incoa.com)**

The information contained in this representative product datasheet describes the average properties of this product offering. INCOA<sup>®</sup> Performance Minerals does not warranty or guarantee this data as representing the exact specifications of the product nor does it claim to provide applicability or fitness for use in any application.