

ORIENT BLACK[®] N762

FURNACE BLACK

PRODUCT DESCRIPTION

Orient Black N762 is a low surface area, low structure semi-reinforcing soft grade carbon black providing high resilience and excellent processing properties.


APPLICATION

Orient Black N762 can be used as reinforcing filler for extruded goods, belts, hoses, tyre inner liner, tubes and profile. It gives excellent processibility in numerous rubber goods.



RECOMMENDED APPLICATION

■ Highly recommended ■ Recommended under advice ■ Not recommended

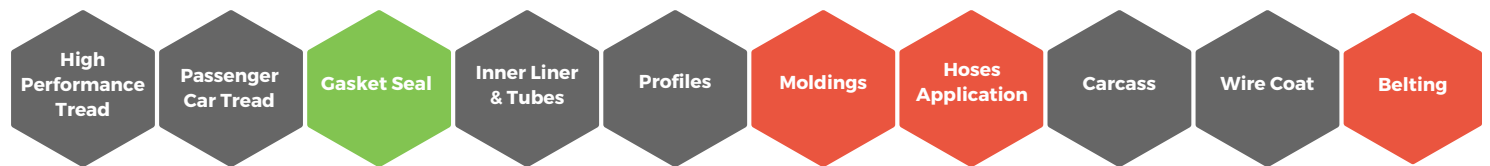

QUALITY PARAMETERS

Property	Unit	Typical value	Test method
Iodine Adsorption No.	g/kg	27	ASTM D1510
OAN	cm ³ /100g	65	ASTM D2414
COAN	cm ³ /100g	59	ASTM D3493
STSA	m ² /g	28	ASTM D6556
Ash Content	%	≤0.75	ASTM D1506
Heating Loss	%	≤1.5	ASTM D1509

PACKAGING

Packaging mode	Per unit qty. (kg)	No. of bags/40 ft. container
Paper Bag	25	880
Big Bag (FIBC)	1150	20

PRODUCT SAFETY

- Product is REACH registered
- Refer to our SDS for handling purpose, as available on www.pcblttd.com

Note: This TDS is applicable for both PCBL Limited and PCBL (TN) Limited.

PCBL Limited

Registered Office: 31 Netaji Subhas Road, Kolkata - 700 001, WB, India

Corporate Office: RPSG House, 4th Floor, 2/4 Judges Court Road, Kolkata - 700 027, WB, India

W: www.pcblttd.com | E: pcbl.mktg-international@rpsg.in | pcbl.mktg-national@rpsg.in | pcbl.rubbtech@rpsg.in

Revision No. - 01
Issue - Dec. 2023

