

ORIENT BLACK[®] N774

FURNACE BLACK

PRODUCT DESCRIPTION

Orient Black N774 is a low surface area, low structure, soft grade carbon black providing high resilience, good elasticity resistance and bending resistance.


APPLICATION

Orient Black N774 can be used as reinforcing filler for belting, moldings, hoses, hose cover, tyre inner liner, tubes and profile. It gives excellent processibility in numerous rubber goods.



RECOMMENDED APPLICATION

■ Highly recommended ■ Recommended under advice ■ Not recommended

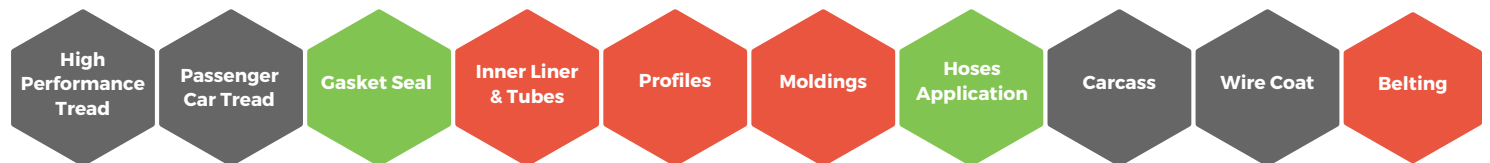

QUALITY PARAMETERS

Property	Unit	Typical value	Test method
Iodine Adsorption No.	g/kg	29	ASTM D1510
OAN	cm ³ /100g	72	ASTM D2414
COAN	cm ³ /100g	63	ASTM D3493
STSA	m ² /g	29	ASTM D6556
Ash Content	%	≤0.75	ASTM D1506
Heating Loss	%	≤1.5	ASTM D1509

PACKAGING

Packaging mode	Per unit qty. (kg)	No. of bags/40 ft. container
Paper Bag	25	960
Big Bag (FIBC)	1150	20

PRODUCT SAFETY

- Product is REACH registered
- Refer to our SDS for handling purpose, as available on www.pcblttd.com

Note: This TDS is applicable for both PCBL Limited and PCBL (TN) Limited.

PCBL Limited

Registered Office: 31 Netaji Subhas Road, Kolkata - 700 001, WB, India

Corporate Office: RPSG House, 4th Floor, 2/4 Judges Court Road, Kolkata - 700 027, WB, India

W: www.pcblttd.com | E: pcbl.mktg-international@rpsg.in | pcbl.mktg-national@rpsg.in | pcbl.rubbtech@rpsg.in

Revision No. - 01
Issue - Dec. 2023

