

PEBAX[®]

RNEW[®] 70R53 SP 01

Pebax[®] Rnew[®] 70R53 SP 01 resin is a thermoplastic elastomer made of flexible polyether and rigid polyamide based on renewable resources. This SP grade has been developed to be heat and UV resistant.

The percentage of **renewable carbon measured** according to ASTM D6866 is 88%.

MAIN CHARACTERISTICS

PROPERTIES	DRY / COND	UNIT	TEST STANDARD
RHEOLOGICAL PROPERTIES			
Molding Shrinkage, parallel	1.3 / *	%	ISO 294-4, 2577
Molding Shrinkage, normal	1.2 / *	%	ISO 294-4, 2577
MECHANICAL PROPERTIES			
Tensile Modulus	- / 360	MPa	ISO 527-1/-2
Yield stress	- / 24	MPa	ISO 527-1/-2
Yield strain	- / 42	%	ISO 527-1/-2
Nominal Strain at Break	- / >50	%	ISO 527-1/-2
Stress at 300% Elongation	57 / *	MPa	ISO 527-1/-2
Strain at Break TPE	>300 / *	%	ISO 527-1/-2
Shore D Hardness	62 / *	-	ISO 868
Charpy Impact Strength, +23°C	- / No Break	kJ/m ²	ISO 179/1eU
Charpy Impact Strength, -30°C	- / No Break	kJ/m ²	ISO 179/1eU
Charpy Notched Impact Strength, +23°C	- / No Break	kJ/m ²	ISO 179/1eA
Charpy Notched Impact Strength, -30°C	- / 15	kJ/m ²	ISO 179/1eA
THERMAL PROPERTIES			
Melting Temperature, 10°C/min	186 / *	°C	ISO 11357-1/-3
Vicat Softening Temperature, 50°C/h 50N	175 / *	°C	ISO 306
OTHER PROPERTIES			
Water Absorption	1 / *	%	Sim. to ISO 62
Humidity Absorption	0.7 / *	%	Sim. to ISO 62
Density	1030 / 1030	kg/m ³	ISO 1183
%Bio-Based	88	-	ASTM D6866

MAIN APPLICATIONS:

- Ski shoes
- Athletic foot wear components

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

ARKEMA

PEBAX[®]

RNEW[®] 70R53 SP 01

PACKAGING:


This grade is delivered dried in sealed packaging (20 and 25 kg bags) ready to be processed.

SHELF LIFE:


Two years from the delivery. For any use above this limit, please refer to our technical services.

DIAGRAMS

STRESS-STRAIN

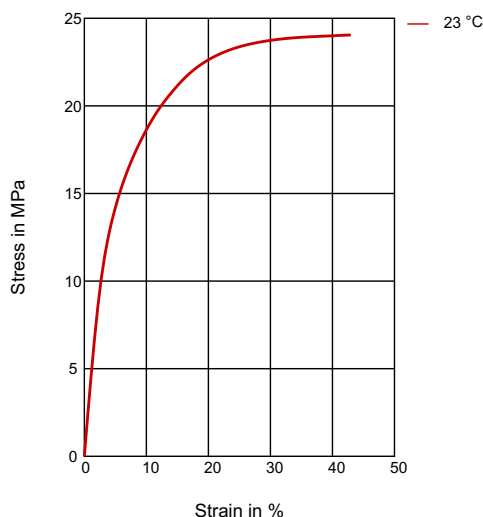

SECANT MODULUS-STRAIN

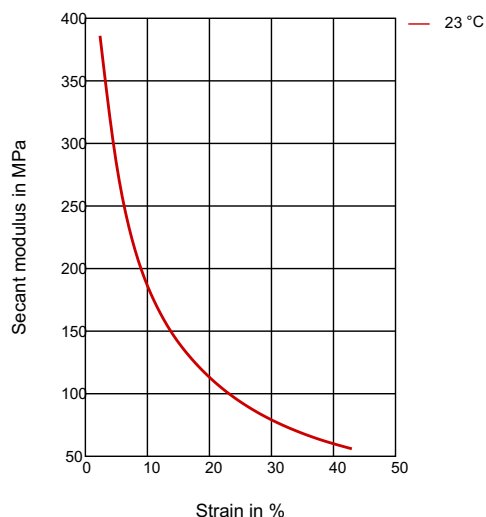

Processing conditions:

- Typical melt temperature (Min / Recommended / Max) : 230°C / 260°C / 290°C.
- Typical mold temperature : 25 – 60°C.
- Drying time and temperature (only necessary for bags opened for more than two hours) : 5-7 hours at 70-80°C.

Processing conditions:

- Typical melt temperature (Min / Recommended / Max): 220°C / 235°C / 250°C.
- Drying time and temperature (only necessary for bags opened for more than two hours): 5-7 hours at 70-80°C.

PROCESSING

Injection Molding, Film Extrusion, Profile Extrusion, Other Extrusion, Transfer Molding, Casting, Thermoforming

DELIVERY FORM

Pellets

SPECIAL CHARACTERISTICS

Bio-Based, Heat Stabilized, Light Stabilized

REGIONAL AVAILABILITY

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

ARKEMA

PEBAX[®]

RNEW[®] 70R53 SP 01

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

Pebax[®] Rnew[®] is a registered trademark of Arkema
© 2022 Arkema Inc. All rights reserved.

ARKEMA

Arkema Inc - High Performance Polymers

900 First Avenue
King of Prussia, PA 19406
Tel.: +1 610 205 7000
Fax: +1 610 205 7497
hpp.arkema.com

Headquarters: Arkema France

420, rue d'Estienne d'Orves
92705 Colombes Cedex – France
Tel.: +33 1 49 00 80 80
Fax: +33 1 49 00 83 96
arkema.com