

# EBECRYL® 8315

Aliphatic Urethane Tetraacrylate

August 2019



## INTRODUCTION

EBECRYL 8315 is an aliphatic urethane tetraacrylate diluted with the reactive diluent hydroxypropyl methacrylate (HPMA). Films of EBECRYL 8315 cured by ultraviolet light (UV) or electron beam (EB) have a unique combination of hardness, toughness, flexibility, and abrasion resistance coupled with outstanding exterior durability properties. These performance properties make EBECRYL 8315 ideal for applications such as paint protection, printed electronics, automotive interior film and embossing or thermoforming after cure.

## PERFORMANCE HIGHLIGHTS

EBECRYL 8315 is characterized by:

- Light color
- Low odor
- Moderate viscosity
- Self healing properties of minor scratches

UV/EB cured products containing EBECRYL 8315 are characterized by the following performance properties:

- Excellent toughness
- Excellent abrasion resistance
- Thermoformable after cure
- Outstanding weatherability
- Flexibility
- Good hardness
- Good adhesion
- Non-yellowing

The actual properties of UV/EB cured products also depend on the selection of other formulation components, such as reactive diluents, additive, and photoinitiators.

## SUGGESTED APPLICATIONS

Formulated UV/EB curable products containing EBECRYL 8315 may be applied via direct or reverse roll, offset gravure, metering rod, slot die, knife over roll, air knife, curtain, immersion and spin coating methods, as well as screen printing. , 8315 is recommended for use in:

- Automotive paint protection films
- Automotive OEM or Re-finish
- Coatings for plastic and wood requiring outstanding exterior durability
- Printed electronics
- Post-formable coatings for plastic, metallized plastic, metal, and conduit substrates
- Optical coatings
- Non-yellowing topcoats for wood
- Exterior durable coatings


## TYPICAL PHYSICAL PROPERTIES

Appearance	Clear liquid
Color, Gardner scale	<2
Density, g/ml at 25°C	1.13
NCO, %	<0.1
Functionality, theoretical <sup>(1)</sup>	4
Oligomer, % by weight	79.3
HPMA, % by weight	19.7
Viscosity, 25°C, cP/mPa-s	9200

## TYPICAL CURED PROPERTIES<sup>(2)</sup>

Tensile strength, psi (MPa)	5000 (34)
Elongation at break, %	100
Young's modulus, psi (MPa)	125000 (862)
Glass transition temperature, °C <sup>(3)</sup>	90

## GRAPH I

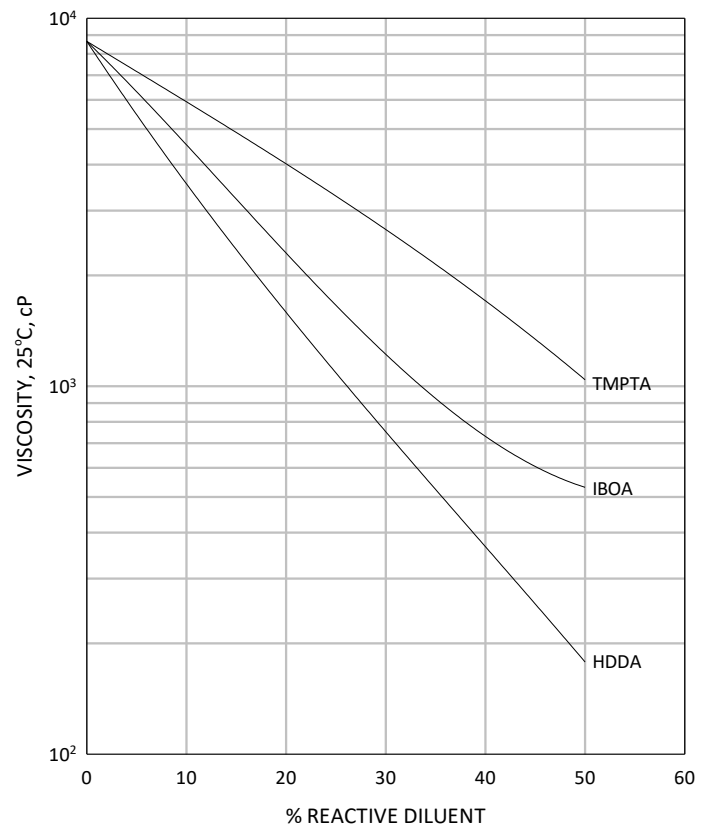**EBECRYL 8315 - VISCOSITY REDUCTION WITH REACTIVE DILUENTS**

(1) Theoretical determination based on the undiluted oligomer.

(2) UV cured 125 μ thick films.

(3) Determined by Dynamic Mechanical Analysis.


## VISCOSITY REDUCTION

Graph I shows the viscosity reduction of EBECRYL 8315 with 1,6-hexanediol diacrylate (HDDA)<sup>(1)</sup>, isobornyl acrylate (IBOA)<sup>(1)</sup> and trimethylolpropane triacrylate (TMPTA)<sup>(1)</sup>. Although viscosity reduction can be achieved with non-reactive solvents, reactive diluents are preferred because they are essentially 100 percent converted during UV/EB exposure to form a part of the coating or ink, thus reducing solvent emissions. The specific reactive diluents used will influence performance properties such as hardness and flexibility.

Graph II illustrates the change in viscosity of EBECRYL 8315 with increasing temperature.

## GRAPH II

### EBECRYL 8315 - VISCOSITY VS. TEMPERATURE

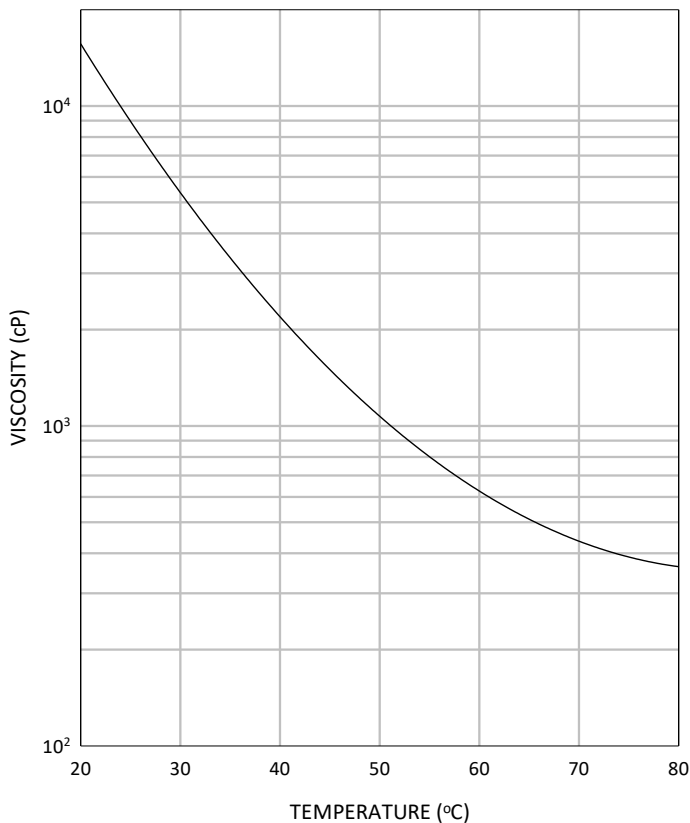

## PRECAUTIONS

Before using EBECRYL 8315, see the Safety Data Sheet (SDS) for information on the identified hazards of the material and the recommended personal protective equipment and procedures.

## STORAGE AND HANDLING

Care should be taken not to expose the product to high temperature conditions, direct sunlight, ignition sources, oxidizing agents, alkalis or acids. This might cause uncontrollable polymerization of the product with the generation of heat. Storage and handling should be in stainless steel, amber glass, amber polyethylene or baked phenolic lined containers. Procedures that remove or displace oxygen from the material should be avoided. Do not store this material under an oxygen free atmosphere. Dry air is recommended to displace material removed from the container. Wash thoroughly after handling. Keep container tightly closed. Use with adequate ventilation.

See the SDS for the recommended storage temperature range for EBECRYL 8315.

Please refer to the allnex Guide to Safety and Handling of Acrylate Oligomers and Monomers for additional information on the safe handling of acrylates.

(1) Product of allnex

[www.allnex.com](http://www.allnex.com)

Disclaimer: allnex Group companies ("allnex") exclude all liability with respect to the use made by anyone of the information contained herein. The information contained herein represents allnex's best knowledge but does not constitute any express or implied guarantee or warranty as to the accuracy, the completeness or relevance of the data set out herein. Nothing contained herein shall be construed as conferring any license or right under any patent or other intellectual property rights of allnex or of any third party. The information relating to the products is given for information purposes only. No guarantee or warranty is provided that the product and/or information is suitable for any specific use, performance or result. Any unauthorized use of the product or information may infringe the intellectual property rights of allnex, including its patent rights. The user should perform his/her own tests to determine the suitability for a particular purpose. The final choice of use of a product and/or information as well as the investigation of any possible violation of intellectual property rights or misappropriation of trade secrets of allnex and/or third parties remain the sole responsibility of the user.

Notice: Trademarks indicated with ®, TM or ® as well as the allnex name and logo are registered, unregistered or pending trademarks of Allnex Netherlands B.V. or its directly or indirectly affiliated allnex Group companies.