

# ORIENT BLACK<sup>®</sup> N660

## FURNACE BLACK

### PRODUCT DESCRIPTION

Orient Black N660 is a low surface area, medium structure general purpose soft grade carbon black which provides medium reinforcement and excellent workability.


### APPLICATION

Orient Black N660 can be used as reinforcing filler in tyre belt ply, tyre inner liners, tubes, profile compounds, molding, hoses, hose covers, shoe soles and heels. It offers lower heat buildup, long fatigue life and good processibility.



### RECOMMENDED APPLICATION

 Highly recommended  Recommended under advice  Not recommended

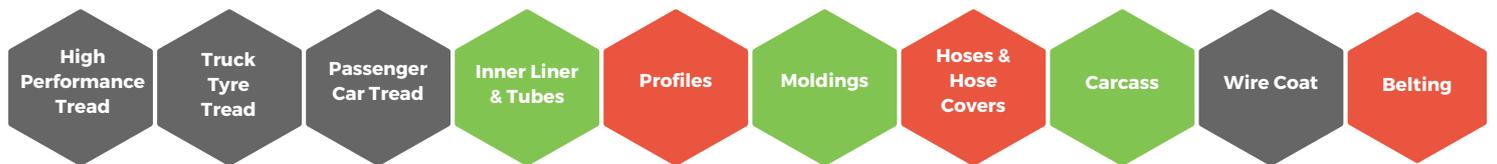

### QUALITY PARAMETERS

Property	Unit	Typical value	Test method
Iodine Adsorption No.	g/kg	36	ASTM D1510
OAN	cm <sup>3</sup> /100g	90	ASTM D2414
COAN	cm <sup>3</sup> /100g	74	ASTM D3493
STSA	m <sup>2</sup> /g	34	ASTM D6556
Ash Content	%	≤0.75	ASTM D1506
Heating Loss	%	≤1.5	ASTM D1509

### PACKAGING

Packaging mode	Per unit qty. (kg)	No. of bags/40 ft. container
Paper Bag	25	960
Big Bag (FIBC)	1150	20

### PRODUCT SAFETY

- Product is REACH registered
- Refer to our SDS for handling purpose, as available on [www.pcblltd.com](http://www.pcblltd.com)

Note: This TDS is applicable for both PCBL Limited and PCBL (TN) Limited.

### PCBL Limited

Registered Office: 31 Netaji Subhas Road, Kolkata - 700 001, WB, India

Corporate Office: RPSG House, 4th Floor, 2/4 Judges Court Road, Kolkata - 700 027, WB, India

W: [www.pcblltd.com](http://www.pcblltd.com) | E: [pcbllmktg-international@rpsg.in](mailto:pcbllmktg-international@rpsg.in) | [pcbllmktg-national@rpsg.in](mailto:pcbllmktg-national@rpsg.in) | [pcbllrubbertech@rpsg.in](mailto:pcbllrubbertech@rpsg.in)

Revision No. - 01  
Issue - Dec. 2023

