

EBECRYL® 7100

Acrylated Amine

March 2018



INTRODUCTION

EBECRYL 7100 is an acrylated amine primarily used as a hydrogen donor, or photoactivator, in ultraviolet light (UV) curable coatings and inks. When used in formulations in combination with a photosensitizer (e.g. benzophenone), EBECRYL 7100 provides rapid UV cure response in air by mitigating the effects of oxygen inhibition at the coating or ink surface. Unlike conventional tertiary amines such as N-methyldiethanolamine, EBECRYL 7100 reacts to become part of the UV cured polymer, resulting in lower residual odor and improved moisture resistance. EBECRYL 7100 also promotes adhesion to plastic substrates and lowers viscosity when used as a primary component in UV adhesives and coatings.

PERFORMANCE HIGHLIGHTS

EBECRYL 7100 is characterized by:

- Low viscosity
- Light color
- Improved stability vs. conventional tertiary amines
- Excellent pigment wetting

UV/EB cured products based on EBECRYL 7100 are characterized by the following performance properties:

- Excellent UV cure response
- Reduced odor
- Improved moisture resistance
- No surface migration of amine
- High gloss
- Good adhesion to plastics (e.g. treated polyester, ABS, polycarbonate and polyphenylene oxide)

The final properties of UV/EB cured products also depend on the selection of the other formulation components, such as reactive diluents, additives and photoinitiators.

SUGGESTED APPLICATIONS

Formulated UV/EB curable products containing EBECRYL 7100 may be applied via direct or reverse roll, offset gravure, metering rod, slot die, knife over roll, air knife, curtain and immersion and spin coating methods, as well as screen printing. EBECRYL 7100 is recommended for:

- Coatings for paper and plastics
- Overprint varnishes
- Screen inks
- Wood topcoats

SPECIFICATIONS

	VALUE
Appearance	Clear liquid
Color, Gardner scale, max.	2
Viscosity, 25°C, cP/mPa-s	800-1400

TYPICAL PHYSICAL PROPERTIES


Density, g/ml at 25°C	1.10
Weight/amine, theoretical	404

TYPICAL CURED PROPERTIES⁽¹⁾

Tensile strength, psi (MPa)	450 (3.1)
Elongation at break, %	23
Young's modulus, psi (MPa)	2600 (17.9)

GRAPH I

EBECRYL 7100 - VISCOSITY REDUCTION WITH REACTIVE DILUENTS

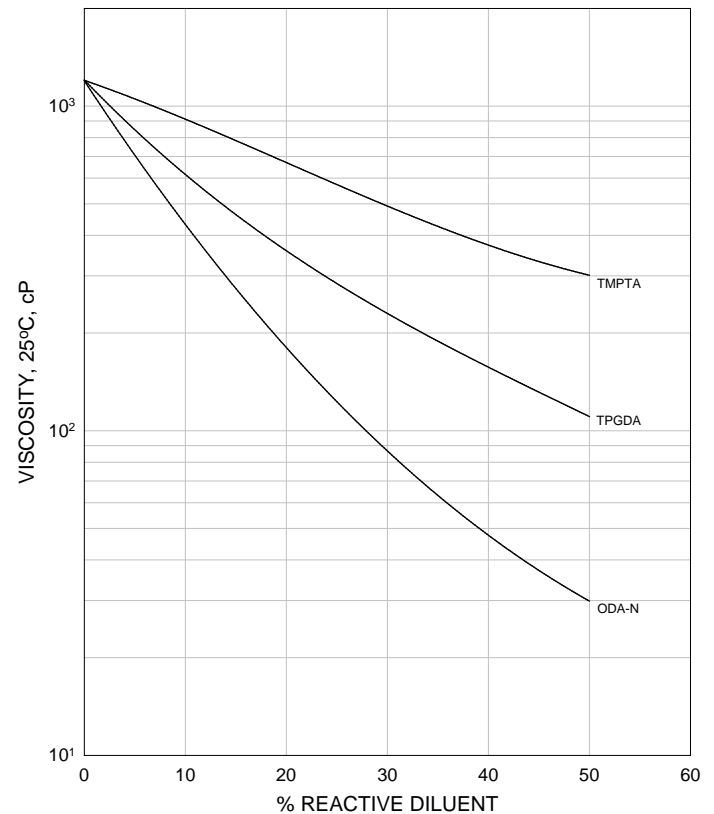

(1) UV cured 125 μ thick films.

VISCOSITY REDUCTION

Graph I shows the viscosity reduction of EBECRYL 7100 with octyl/decyl acrylate (ODA-N)⁽¹⁾, trimethylolpropane triacrylate (TMPTA)⁽¹⁾, and tripropylene glycol diacrylate (TPGDA)⁽¹⁾. Although viscosity reduction can be achieved with non-reactive solvents, reactive diluents are preferred because they are essentially 100 percent converted during UV/EB exposure to form a part of the coating, thus avoiding solvent emissions. The specific reactive diluents used will influence performance properties such as hardness and flexibility.

EBECRYL 7100 can also be used as a reactive diluent for more viscous acrylated oligomers.

PRECAUTIONS

Before using EBECRYL 7100, see the Safety Data Sheet (SDS) for information on the identified hazards of the material and the recommended personal protective equipment and procedures.

STORAGE AND HANDLING

Care should be taken not to expose the product to high temperature conditions, direct sunlight, ignition sources, oxidizing agents, alkalis or acids. This might cause uncontrollable polymerization of the product with the generation of heat. Storage and handling should be in stainless steel, amber glass, amber polyethylene or baked phenolic lined containers. Procedures that remove or displace oxygen from the material should be avoided. Do not store this material under an oxygen free atmosphere. Dry air is recommended to displace material removed from the container. Wash thoroughly after handling. Keep container tightly closed. Use with adequate ventilation.

See the SDS for the recommended storage temperature range for EBECRYL 7100.

Please refer to the allnex Guide to Safety and Handling of Acrylate Oligomers and Monomers for additional information on the safe handling of acrylates.

(1) Product of allnex.

www.allnex.com

Disclaimer: allnex Group companies ("allnex") decline any liability with respect to the use made by anyone of the information contained herein. The information contained herein represents allnex's best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, regarding the accuracy, the completeness or relevance of the data set out herein). Nothing contained herein shall be construed as conferring any license or right under any patent or other intellectual property rights of allnex or of any third party. The information relating to the products is given for information purposes only. No guarantee or warranty is provided that the product and/or information is adapted for any specific use, performance or result and that product and/or information do not infringe any allnex and/or third party intellectual property rights. The user should perform his/her own tests to determine the suitability for a particular purpose. The final choice of use of a product and/or information as well as the investigation of any possible violation of intellectual property rights of allnex and/or third parties remains the sole responsibility of the user.

Notice: Trademarks indicated with ®, ™ or * as well as the allnex name and logo are registered, unregistered or pending trademarks of Allnex IP s.à.r.l. or its directly or indirectly affiliated allnex Group companies.