

CARPOL[®] EDAP-770

Polyether Polyol

CARPOL[®] EDAP-770 is an ethylenediamine-initiated polyether polyol. The resulting material has a nominal functionality of four and a typical hydroxyl number of 770. This tetrol is polymerized solely with propylene oxide and is autocatalytic due to its amine content. This polyol's functionality makes it optimal for use in rigid foams as a crosslinking modifier. In addition, CARPOL[®] EDAP-770 can also be used as a curative for most C.A.S.E. applications.


Typical End Use Applications

- Rigid Foam**
- Coatings**
- Adhesives**
- Spray Foam**
- Sealants**
- Elastomers**

Typical Analytical Properties*

Hydroxyl Number (mg KOH / g)	770
pH (10 parts of IPA: 6 parts of H ₂ O)	11.0
Moisture (%) [maximum]	0.05
Color (Gardner) [maximum]	2
Appearance	Free & Clear
Viscosity @ 25 °C (cP)	56,000
Density @ 25 °C (lb / gal)	8.64
Total Amine Value (mg KOH / g)	384.0

Viscosity Profile

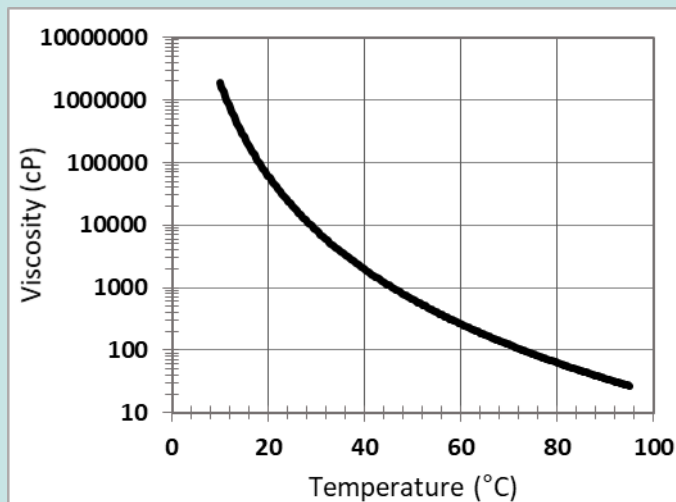

Viscosity Information

77 °F	140 °F	160 °F
56,000 cP	220 cP	120 cP

*Please note that these values are not specifications

Storage Information

CARPOL[®] EDAP-770 will absorb water if the product container is not secured properly. This may affect reactivity, appearance, and performance. Therefore, it is advised that all receptacles containing this material be tightly fastened and stored in a dry place.

Consult the Safety Data Sheet for additional information.

Health and Safety Information

Health and safety information is available in the form of a Safety Data Sheet. This literature, describing proper precautions and personal protective gear, is available for review. To receive this information please contact a Carpenter Co. representative.

Ordering and Shipping Options

Sample Sizes

1 quart

1 gallon

5 gallon

Products Packaged/Shipped

Drum 460 lb net wt.

Totebin 2,300 lb net wt.

Tankwagon 40,000-45,000 lb net wt.

Railcar 185,000-189,000 lb net wt.

For additional information please contact:

Carpenter Co.

Chemicals Division

Customer Service 800-260-5373

5016 Monument Avenue

Richmond VA 23230

Updated 10 Feb 2019

Important: The information contained in this product data sheet is offered for your consideration, investigation, and verification. The data is presented in good faith and is believed to be reliable. Carpenter, however, makes no representation as to the completeness or accuracy. Carpenter makes no warranty, express or implied, with respect to the data contained herein. Carpenter cannot anticipate all conditions under which this data and the product may be used. The conditions of handling, storage, use, and disposal of the product are beyond Carpenter's control. Thus we expressly disclaim responsibility or liability for any loss, damage, or expense arising out of reliance on the information contained herein. You are advised to make your own determination as to safety, suitability, and appropriate manner of handling, storage, use, and disposal. For further information please consult the appropriate Carpenter Safety Data Sheet. **Warning:** These products can be used to prepare a variety of polyurethane products. Polyurethanes are organic materials and must be considered combustible.