

## Durastrength<sup>®</sup> 440

### Acrylic Impact Modifier

#### PRODUCT DESCRIPTION

Durastrength<sup>®</sup> 440 impact modifier is based on novel acrylic chemistry designed to impart excellent ambient and cold temperature impact to PC and PC blends.


#### TYPICAL PHYSICAL PROPERTIES

Physical Form	White Powder
Specific Gravity	1.09
Bulk Density	0.50 g/cc
Particle Size	2% Max on 50 Mesh
Percent Volatiles	1.0% Max

#### PRODUCT BENEFITS

1. The low  $T_g$  core of the Durastrength<sup>®</sup> 440 impact modifier enables it to be used in applications typically reserved for MBS modifiers. For demanding low temperature applications, it can be used to create products that can withstand -40°C and still remain ductile.


#### Impact Performance of Durastrength<sup>®</sup> 440 IM in Polycarbonate

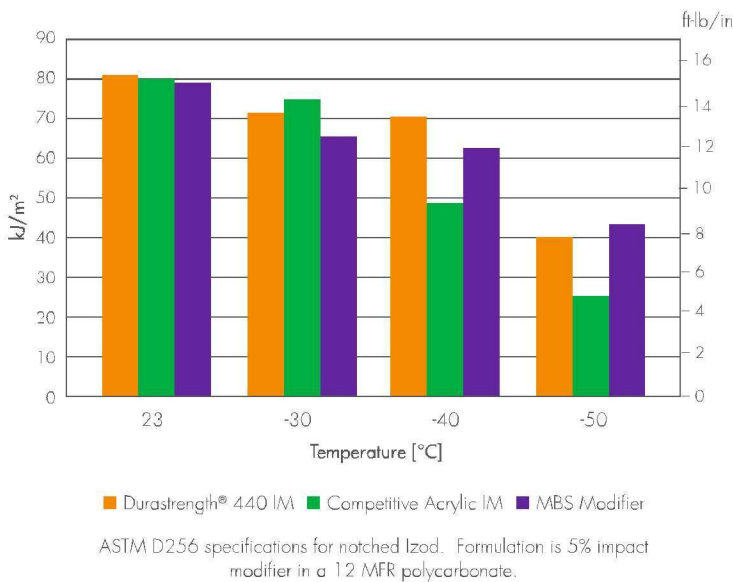

2. Durastrength<sup>®</sup> 440 all-acrylic impact modifier provides the excellent weatherability for which acrylics are known, opening the door for use in applications that demand retention of color and mechanical properties upon exposure to the elements.

3. The properties of Durastrength<sup>®</sup> 440 impact modifier have been optimized to provide a readily dispersed modifier that has a minimal impact on the color of molded parts. Conventional acrylics can give a faded appearance and inhomogeneous mold-in color. Durastrength<sup>®</sup> 440 impact modifier overcomes these deficiencies permitting the use of acrylic modifiers in the molding of high-viscosity resins into thin-walled geometries.

#### Color Stability of Durastrength<sup>®</sup> 440 IM During High-Speed Injection Molding

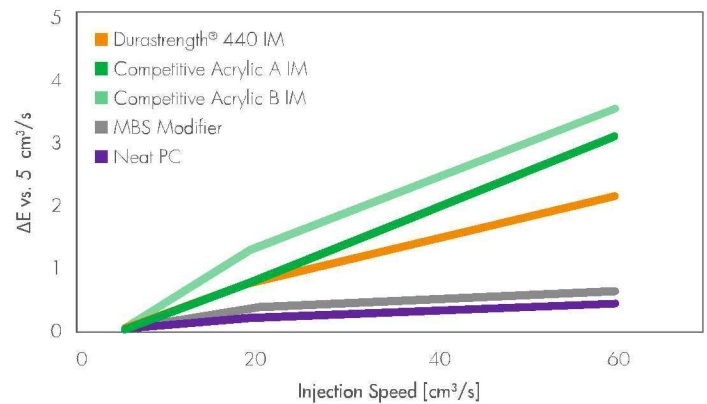

Formulation contained 5% impact modifier and 0.5% blue pigment in an 1.1 MFR polycarbonate. Molded at 300°C through a 2 mm x 6 mm gate.

4. Durastrength<sup>®</sup> 440 impact modifier has minimal effect on other polymer properties.

#### SUGGESTIONS FOR USE

Durastrength<sup>®</sup> 440 impact modifier is recommended for use in PC and PC blends where superior low temperature impact and weatherability are required.

Durastrength<sup>®</sup> 440 impact modifier is targeted for use in automotive applications, lawn and garden equipment, and recreational vehicles where weatherability and good low temperature impact are important.

Prospective clients should evaluate Durastrength<sup>®</sup> 440 impact modifier in their own laboratories to establish optimum conditions in their processes and applications. Arkema's Technical Service Team is available to discuss your application requirements provide formulation guidance and laboratory testing as needed.

#### PACKAGING

Durastrength<sup>®</sup> 440 impact modifier is packaged in 25 kg bags and 1,000 lb bulk bags.

## ENVIRONMENTAL AND SAFETY INFORMATION

BEFORE HANDLING THIS MATERIAL, READ AND UNDERSTAND THE MSDS (MATERIAL SAFETY DATA SHEET) / SDS (SAFETY DATA SHEET) FOR ADDITIONAL INFORMATION ON SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION.

The MSDS/SDS are available on our Website [www.arkema.com](http://www.arkema.com) or upon request at our Customer Service Department at +1(800) 331 7654 in the US, and at +33 (0)1 4900 8837 in Europe. Arkema believes strongly in Responsible Care® as a public commitment.

## MORE TECHNICAL INFORMATION AVAILABLE

Ask your Arkema account manager for further information on high quality Arkema additives for use in PVC, PC, PBT, ABS, PLA and other polymer systems. Arkema produces a full line of impact modifiers, processing aids and epoxidized vegetable oils. In addition, Arkema's Technical Service staff is also available to assist compounders and processors with formulation and processing advice.

### Durastrength® Impact Modifiers

Durastrength® acrylic impact modifiers deliver outstanding impact characteristics for outdoor durable applications in PVC and Engineering Resins.

### Plastistrength® Process Aids

Plastistrength® process aids offer producers a complete line of melt strengtheners and metal release agents for PVC and Engineering Resins. Plastistrength® process aids can improve fusion, surging, and aesthetics.

### Clearstrength® Impact Modifiers

Clearstrength® MBS impact modifiers are designed for extreme impact or impact/clarity combination in PVC and Engineering Resins.

### Biostrength® Additives

The Biostrength® product line of impact modifiers, melt strengtheners and metal release agents are designed to improve properties and enhance processability of polylactic acid (PLA) and other biopolymers compounds.

### Vikoflex® Epoxy Plasticizers

The Vikoflex® line of epoxy plasticizers is derived from renewable resources, like epoxidized linseed oil, soybean and tall oil fatty acid esters for applications such as PVC plasticization, acid and mercaptan scavenging, specialty coatings, adhesives & urethanes, reactive diluents, PU flexible foam and intermediates for surfactants and lube & fuel additives.

## FOR MORE INFORMATION CONTACT

Please contact your local account manager or our headquarters:

In Europe:  
ARKEMA  
Functional Additives  
420 Rue d'Estienne d'Orves  
92705 COLOMBES Cedex, France  
Tel: +33 (0)1 4900 8837  
[functionaladditives.internet@arkema.com](mailto:functionaladditives.internet@arkema.com)  
(email)

In US:  
Arkema Inc.  
Functional Additives Customer Service  
900 First Avenue, King of Prussia, PA  
19406-1308  
Tel: +1 (800) 331 7654  
Fax: +1 (800) 205 7064  
[arkema.usph-fa-cs@arkema.com](mailto:arkema.usph-fa-cs@arkema.com) (e-mail)

In Asia:  
Arkema Pte Ltd.  
10, Science Park Road, #01-01A, The Alpha  
Singapore Science Park II, Singapore 117684  
Tel: +65 6419 9199  
[functionaladditives.internet@arkema.com](mailto:functionaladditives.internet@arkema.com)  
(email)

VISIT US AT OUR WEBSITE  
[www.additives.arkema.com](http://www.additives.arkema.com)

IMPORTANT: The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, ARKEMA expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information; NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN. The information provided herein relates only to the specific product designated and may not be applicable when such product is used in combination with other materials or in any process. The user should thoroughly test any application before commercialization. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent, and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement.

© 2014 Arkema Inc. All rights reserved.

Clearstrength® and Plastistrength® are registered trademarks of Arkema

Biostrength® and Durastrength® are registered trademarks of Arkema Inc.

Vikoflex® is a registered trademark of Viking Chemical Company

Responsible Care® is a registered trademark of the American Chemistry Council Inc.