

PEBAX®

2533 SA 01

Polyether block amide **Pebax® 2533 SA 01** resin is a thermoplastic elastomer made of flexible polyether and rigid polyamide. This SA grade is specially designed to food uses. Its chemical structure also enables the absorption and the controlled release of volatile molecules (fragrances, oils, insecticides...).

MAIN CHARACTERISTICS

PROPERTIES	DRY / COND	UNIT	TEST STANDARD
RHEOLOGICAL PROPERTIES			
Molding Shrinkage, parallel	0.5 / *	%	ISO 294-4, 2577
Molding Shrinkage, normal	0.8 / *	%	ISO 294-4, 2577
MECHANICAL PROPERTIES			
Tensile Modulus	12 / 10	MPa	ISO 527-1/-2
Stress at 50% Strain	3 / 3	MPa	ISO 527-1/-2
Strain at Break	>50 / >50	%	ISO 527-1/-2
Stress at 10% Elongation	1 / *	MPa	ISO 527-1/-2
Stress at 100% Elongation	4 / *	MPa	ISO 527-1/-2
Stress at 300% Elongation	5 / *	MPa	ISO 527-1/-2
Strain at Break TPE	>300 / *	%	ISO 527-1/-2
Stress at Break TPE	32 / *	MPa	ISO 527-1/-2
Shore A Hardness	77 / *	-	ISO 868
Shore D Hardness	22 / *	-	ISO 868
Charpy Impact Strength, +23°C	No Break / No Break	kJ/m ²	ISO 179/1eU
Charpy Impact Strength, -30°C	No Break / No Break	kJ/m ²	ISO 179/1eU
Charpy Notched Impact Strength, +23°C	No Break / No Break	kJ/m ²	ISO 179/1eA
Charpy Notched Impact Strength, -30°C	No Break / No Break	kJ/m ²	ISO 179/1eA
THERMAL PROPERTIES			
Melting Temperature, 10°C/min	134 / *	°C	ISO 11357-1/-3
Vicat Softening Temperature, 50°C/h 50N	58 / *	°C	ISO 306
OTHER PROPERTIES			
Water Absorption	1.2 / *	%	Sim. to ISO 62
Humidity Absorption	0.4 / *	%	Sim. to ISO 62
Density	1000 / 1000	kg/m ³	ISO 1183

- MAIN APPLICATIONS:**
- Flexible injected parts
 - insecticides
 - Controlled release of volatile molecules (fragrances etc...)
 - oils
 - Note: this grade is not recommended by Arkema for usage in medical applications.

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

ARKEMA

PEBAX®

2533 SA 01

For such applications Pebax®

SA 01 MED should be used

PACKAGING:


This grade is delivered dried in sealed packaging (25 kg bags or 550kg rigid containers) ready to be processed.

SHELF LIFE:


Two years from the delivery. For any use above this limit, please refer to our technical services.

DIAGRAMS

STRESS-STRAIN

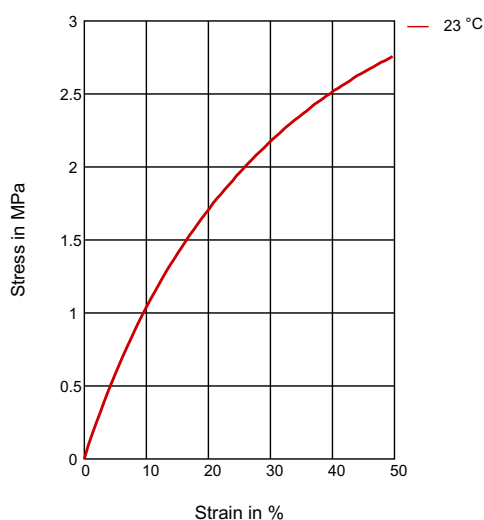

SECANT MODULUS-STRAIN

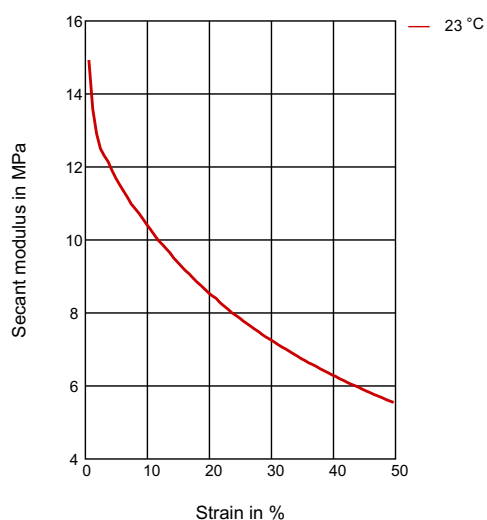

Processing conditions:

- Typical melt temperature (Min / Recommended / Max) : 180°C / 210°C / 240°C.
- Typical mold temperature : 10 – 30°C.
- Drying time and temperature (only necessary for bags/containers opened for more than two hours) : 4-8 hours at 55-65°C.

PROCESSING

Injection Molding

SPECIAL CHARACTERISTICS

Heat Stabilized

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

ARKEMA

PEBAX®

2533 SA 01

DELIVERY FORM

Pellets

ADDITIVES

Lubricants

REGIONAL AVAILABILITY

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

Pebax® is a registered trademark of Arkema
© 2022 Arkema Inc. All rights reserved.

ARKEMA

Arkema Inc - High Performance Polymers

900 First Avenue
King of Prussia, PA 19406
Tel.: +1 610 205 7000
Fax: +1 610 205 7497
hpp.arkema.com

Headquarters: Arkema France

420, rue d'Estienne d'Orves
92705 Colombes Cedex – France
Tel.: +33 1 49 00 80 80
Fax: +33 1 49 00 83 96
arkema.com